




## 42-80 Ton VariCool Renovator with Water Side Economizer

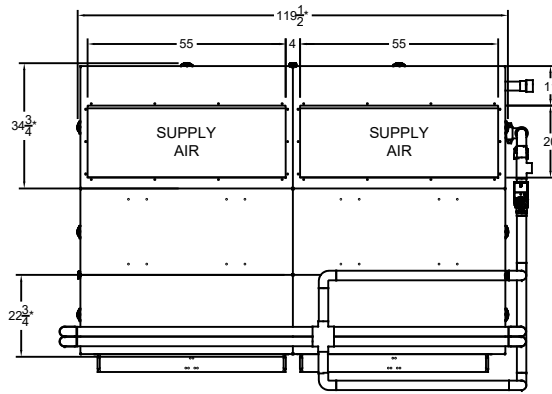


TOP

**NOTES:**

1. UNIT IS COMPRISED OF (14) SECTIONS.
2. DIMENSIONS NOTED WITH \* INCLUDE HARDWARE.
3. A= 5" (2" FILTER BOX) FOR NON DUCTED FRONT FILTER ACCESS APPLICATIONS  
A= 7" (4" FILTER BOX) FOR NON DUCTED FRONT FILTER ACCESS APPLICATIONS  
A= 12" (2" FILTER BOX) FOR DUCTED SIDE FILTER ACCESS APPLICATIONS  
A= 14" (4" FILTER BOX) FOR DUCTED SIDE FILTER ACCESS APPLICATIONS
4. FILTERS ARE LIFT OUT FOR NON-DUCTED RETURNS. DUCTED RETURNS REQUIRE FILTER ACCESS FROM BOTH SIDES.
5. UNIT BASE MUST BE UNIFORMLY SUPPORTED AT SECTIONS/INTERSECTIONS AND NOT ONLY AT CORNERS. SEE IOM FOR FURTHER DETAILS
6. 3D INTELLICLAMP REMOVABLE AND/OR SPLITTABLE IF NEEDED DURING INSTALLATION.
7. OPTIONAL WATER TUBING UTILIZES GROOVED COPPER FITTINGS. OPTIONAL REFRIGERANT CONNECTIONS BETWEEN SECTIONS UTILIZE RE-SEALABLE VALVES/FITTINGS.

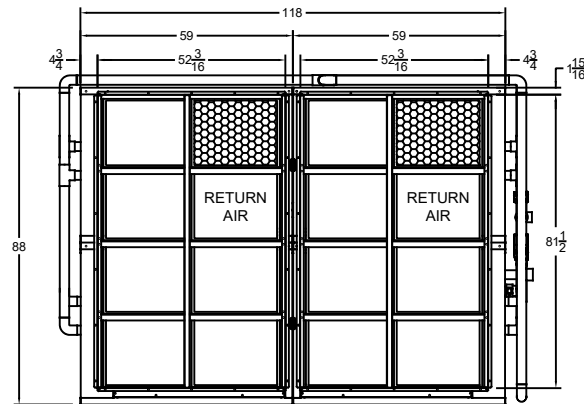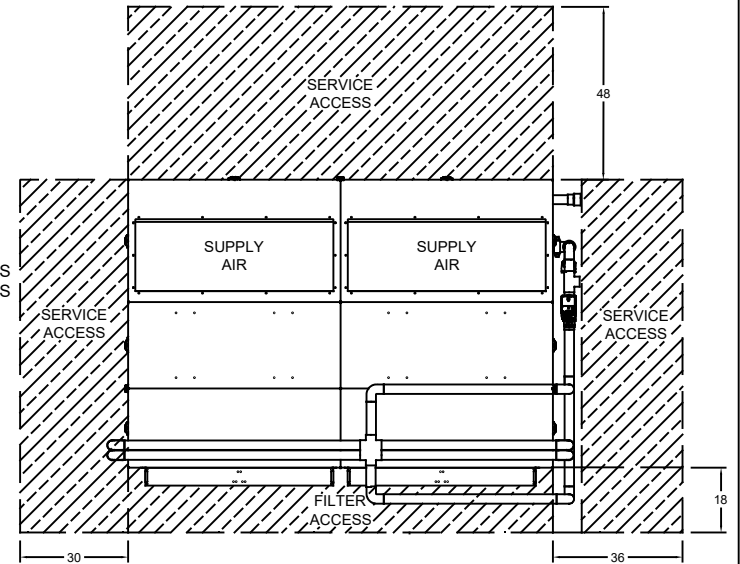


REAR

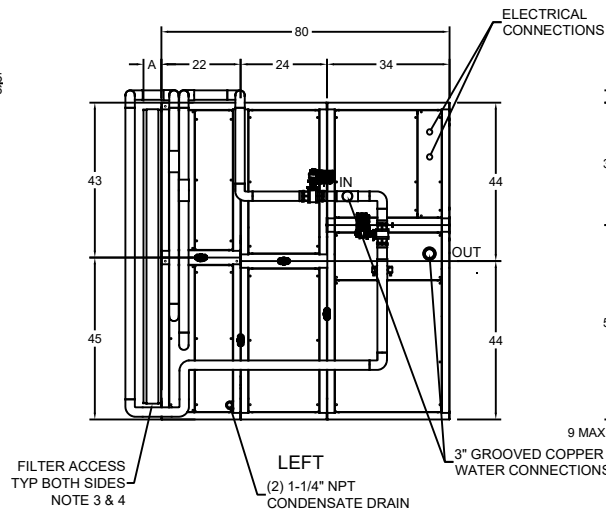

FILTER ACCESS  
TYP BOTH SIDES  
NOTE 3 & 4

LEFT  
(2) 1-1/4" NPT  
CONDENSATE DRAIN

3" GROOVED COPPER  
WATER CONNECTIONS

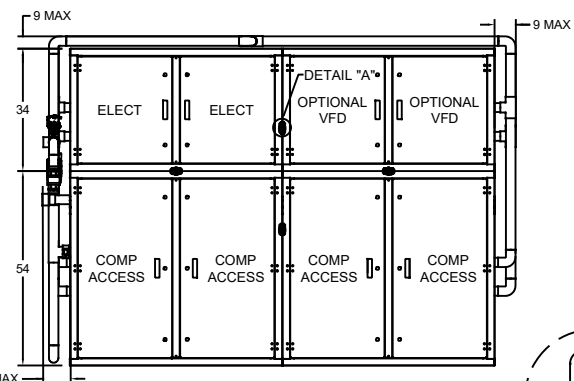

FRONT

